


SNAKE PLUS BENDABLE

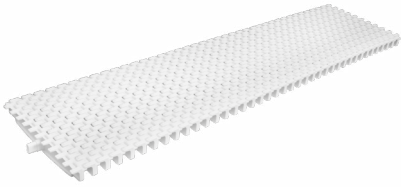

INDEX

1. Code Registry
2. Use
3. Technical Specification


1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight	Colour	Pkg. / Pallet
POZ90-250P1B	Snake Plus - White Modular Grating for Swimming Pool	250 x 1.000 x 25	2,60 kg/m	White	7 m / 84 m
POZ90-250P1A	Snake Plus - Blue Modular Grating for Swimming Pool	250 x 1.000 x 25	2,60 kg/m	Blue	7 m / 84 m
POZ90-250P1B20	Snake Plus - White Modular Grating for Swimming Pool	250 x 1.000 x 20	2,50 kg/m	White	7 m / 84 m
POZ90-250P1A20	Snake Plus - Blue Modular Grating for Swimming Pool	250 x 1.000 x 20	2,50 kg/m	Blue	7 m / 84 m
POZ90-300P1B	Snake Plus - White Modular Grating for Swimming Pool	300 x 1.000 x 25	3,28 kg/m	White	6 m / 72 m
POZ90-300P1A	Snake Plus - Blue Modular Grating for Swimming Pool	300 x 1.000 x 25	3,28 kg/m	Blue	6 m / 72 m

MATERIAL


Made of PP (polypropylene)

POZ90-250P1B e POZ90-250P1A

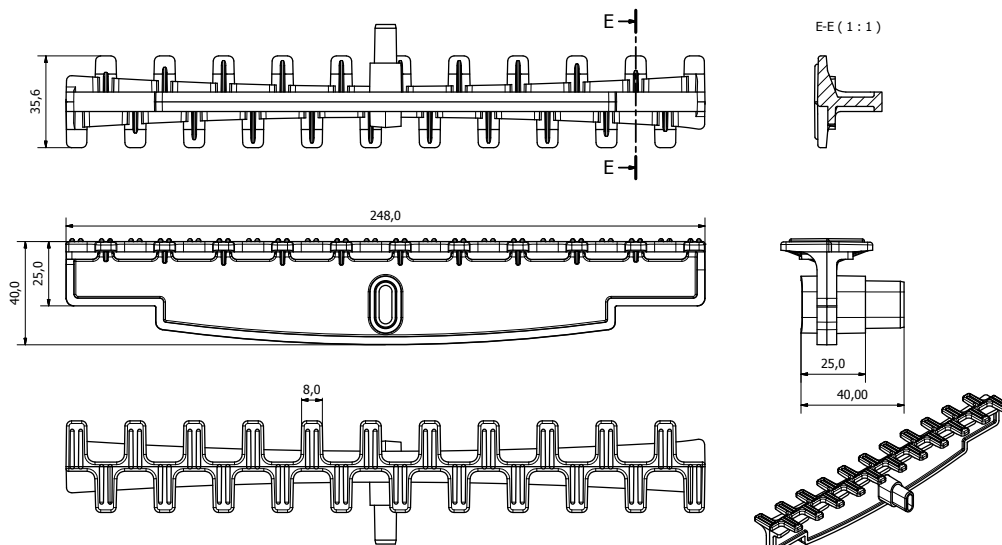


SNAKE PLUS BENDABLE

POZ90-250P1B20 e POZ90-250P1A20

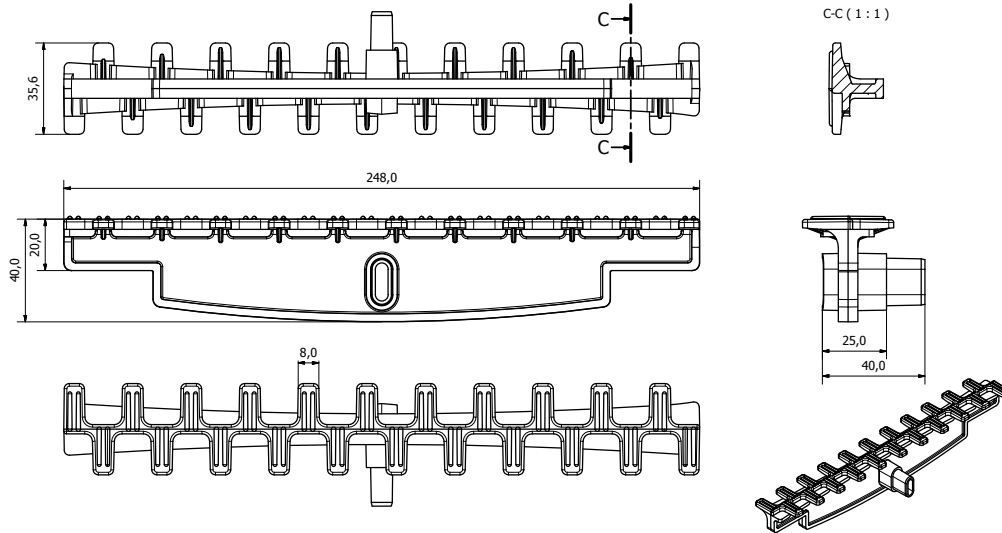

POZ90-300P1B e POZ90-300P1A

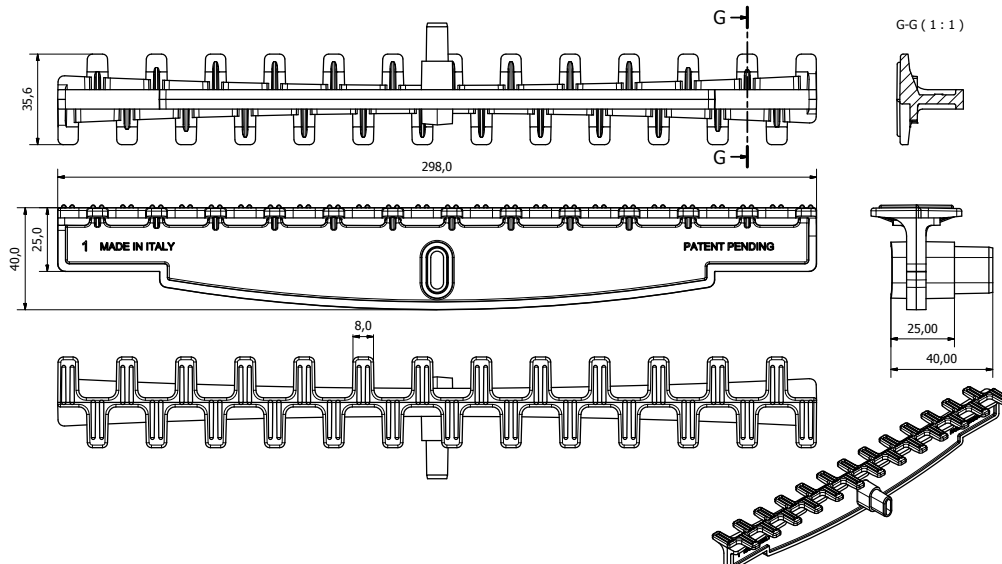

SNAKE PLUS BENDABLE

2. USE

Used at swimming pools edges to allow both slow water outflow and a safe anti-slip surface for pedestrian crossing.

3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.D.POZ90.xxx	Supply and installation to Modular Grating with a slow water runoff and a design projected for pedestrian crossing. The elements that compose this grating are interchangeable and, thanks to bushhammering, show a non-slip surface. Grating with dimensions 250 and 300 have 1 connection points. The Grating is composed by 40 modules to achieve 1.000 mm. Available in white or blue colour. Made of PP (polypropylene). Used at swimming pools edges to allow both slow water outflow and a safe anti-slip surface for pedestrian crossing.		
Dak.D.POZ90.250P1B	250 White - 1 connection point - h. 25.....	m	-
Dak.D.POZ90.250P1A	250 Blue - 1 connection point - h. 25.....	m	-
Dak.D.POZ90.250P1B20	250 White - 1 connection point - h. 20.....	m	-
Dak.D.POZ90.250P1A20	250 Blue - 1 connection point - h. 20.....	m	-
Dak.D.POZ90.300P1B	300 White - 1 connection point - h. 25.....	m	-
Dak.D.POZ90.300P1A	300 Blue - 1 connection point - h. 25.....	m	-