

EXTRA STRONG GRATING WITH CLIP



INDEX


1. Code Registry
2. Use
3. Technical Specification

1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight	Colour	Pkg. / Pallet
POZ90-1351CL	Extra strong grating with clip Grey 130	130 x 20 x 1.000	1,03 kg/pc.	Grey	1 pc. / 340 pcs
POZ90-1351NCL	Extra strong grating with clip Black 130	130 x 20 x 1.000	1,03 kg/pc.	Black	1 pc. / 340 pcs
POZ90-1351SCL	Extra strong grating with clip Sand 130	130 x 20 x 1.000	1,03 kg/pc.	Sand	1 pc. / 340 pcs
POZ90-1351BCL	Extra strong grating with clip White 130	130 x 20 x 1.000	1,03 kg/pc.	White	1 pc. / 340 pcs

MATERIAL

Made of PP (polypropylene) fiber-reinforced.

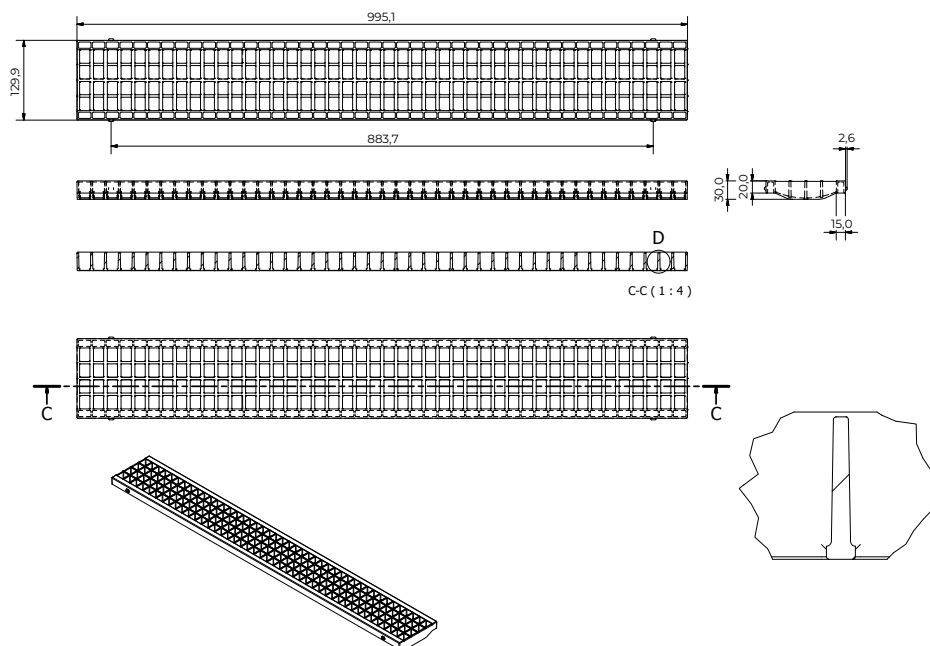

	material	weight	water passage
POZ90-1351CL	polypropylene	1,03 kg	357 cm ²

GRIGLIA EXTRA STRONG CON CLIP

2. USE

It can be used in pedestrian areas or in areas with light vehiculous traffic not longitudinal way.

3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.D.POZ90.1351xCL	Supply and installation to extra strong grating for channel, with ribs at the intrados (lower surface), with a variable section that increases its resistance to shear stress and the load bearing capacity. From internal laboratory test, the payload of the grating is 24 kN (approximately 2.400 kg). It is available with clip to be fixed on Pegasus Plus Channel. There is no intermediate holes for fixing the locking elements (not suitable with Block System). Dimensions: 130 x 20 x 1.000 mm. Available in light grey, black, sand or white. Made of PP (polypropylene) fiber-reinforced. It can be used in pedestrian areas or in areas with light vehiculous traffic not longitudinal way.		
Dak.D.POZ90.1351CL	Extra strong grating with clip Grey.....	pc.	-
Dak.D.POZ90.1351NCL	Extra strong grating with clip Black.....	pc.	-
Dak.D.POZ90.1351SCL	Extra strong grating with clip Sand.....	pc.	-
Dak.D.POZ90.1351BCL	Extra strong grating with clip White.....	pc.	-

STAINLESS OR GALVANIZED STEEL GRATING



INDEX



1. Code Registry
2. Use
3. Technical Specification

1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight	Colour	Pkg. / Pallet
POZ90-135IZI	Stainless Steel Grating 130	130 x 20 x 1.000	1,600 kg/pc.	Stainless Steel	1 pc. / 560 pcs
POZ90-136IZI	Stainless Steel Grating 200	200 x 20 x 1.000	2,700 kg/pc.	Stainless Steel	1 pc. / 540 pcs
POZ90-135IZ	Galvanized Steel Grating 130	130 x 20 x 1.000	1,700 kg/pc.	Galvanized Steel	1 pc. / 560 pcs
POZ90-135IZT	Galvanized Steel Grating for Taurus 130	130 x 20 x 1.000	1,175 kg/pc.	Galvanized Steel	1 pc. / 640 pcs
POZ90-135IZIT	Stainless Steel Grating for Taurus 130	130 x 20 x 1.000	1,600 kg/pc.	Stainless Steel	1 pc. / 640 pcs
POZ90-135IZCL	Galvanized Steel Grating with clip 130	130 x 20 x 1.000	1,700 kg/pc.	Galvanized Steel	1 pc. / 560 pcs
POZ90-136IZ	Galvanized Steel Grating 200	200 x 20 x 1.000	2,600 kg/pc.	Galvanized Steel	1 pc. / 540 pcs

MATERIAL

Made of galvanized steel or AISI 304 stainless steel.

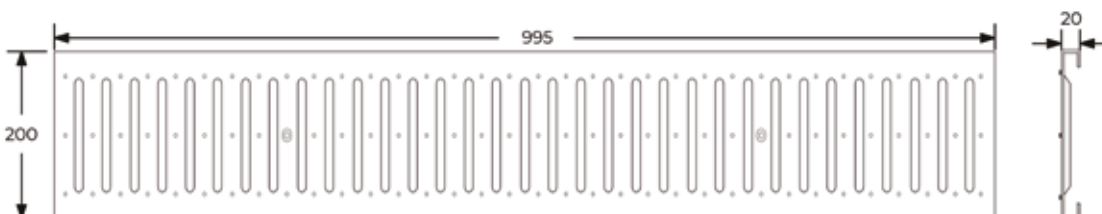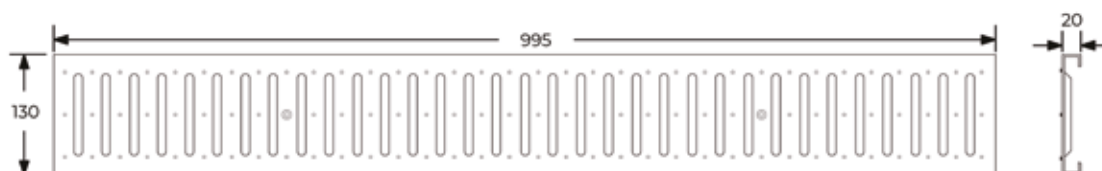

	material	water passage
POZ90-135IZ	Galvanized or stainless steel	315 cm ²
POZ90-136IZ	Galvanized or stainless steel	510 cm ²

STAINLESS OR GALVANIZED STEEL GRATING

2. USE

Used in any domestic environment and/or pedestrian areas.
Resistant to chemical and atmospheric agents (eg. saline), it is recommended for areas close to the sea.

3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.D.POZ90.13x1x	Supply and installation to grating for Dakota's channel with a slotted design and a exclusive "T" shape section on both sides in order to hide the edges of the channel. Loading class of the grating: A15 (pedestrian). Dimensions: 150 x 20 x 1.000 mm. This grating can be used only with Taurus Channel 130. Made of galvanized steel or AISI 304 stainless steel. Used in any domestic environment and/or pedestrian areas. Resistant to chemical and atmospheric agents (eg. saline), it is recommended for areas close to the sea.		
Dak.D.POZ90.1351ZI	Stainless steel grating - 130 mm.....	pc.	-
Dak.D.POZ90.1361ZI	Stainless steel grating - 200 mm.....	pc.	-
Dak.D.POZ90.1351Z	Galvanized steel grating - 130 mm.....	pc.	-
Dak.D.POZ90.1351ZT	Galvanized steel grating for Taurus - 130 mm.....	pc.	-
Dak.D.POZ90.1351ZIT	Stainless steel grating for Taurus - 130 mm.....	pc.	-
Dak.D.POZ90.1351ZCL	Galvanized steel grating with Clip - 130 mm.....	pc.	-
Dak.D.POZ90.1361Z	Galvanized steel grating - 200 mm.....	pc.	-

CAST IRON GRATING 130



INDEX

1. Code Registry
2. Use
3. Technical Specification

1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight	Colour	Pkg. / Pallet
POZ90-1351GBN	Cast Iron Grating B125 130	130 x 500	3,40 kg/pc.	Nera	240 pcs
POZ90-1351GCN	Cast Iron Grating C250 130	130 x 500	3,70 kg/pc.	Nera	240 pcs
POZ90-1351GDN	Cast Iron Grating D400 130	130 x 500	3,90 kg/pc.	Nera	240 pcs


MATERIAL

Made of spheroidal cast iron.

CERTIFICATION

The item is engraved in accordance to EU regulation UNI 1433.


POZ90-1351GBN

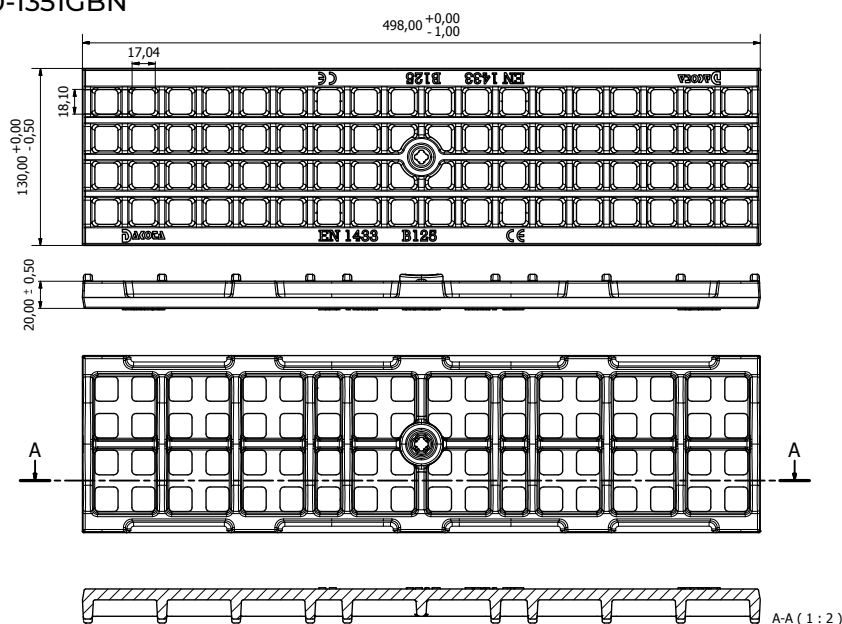

	material	weight	water passage
1351GBN	Cast iron	3,40 kg	222,07 cm²


CAST IRON GRATING 130

POZ90-1351GCN

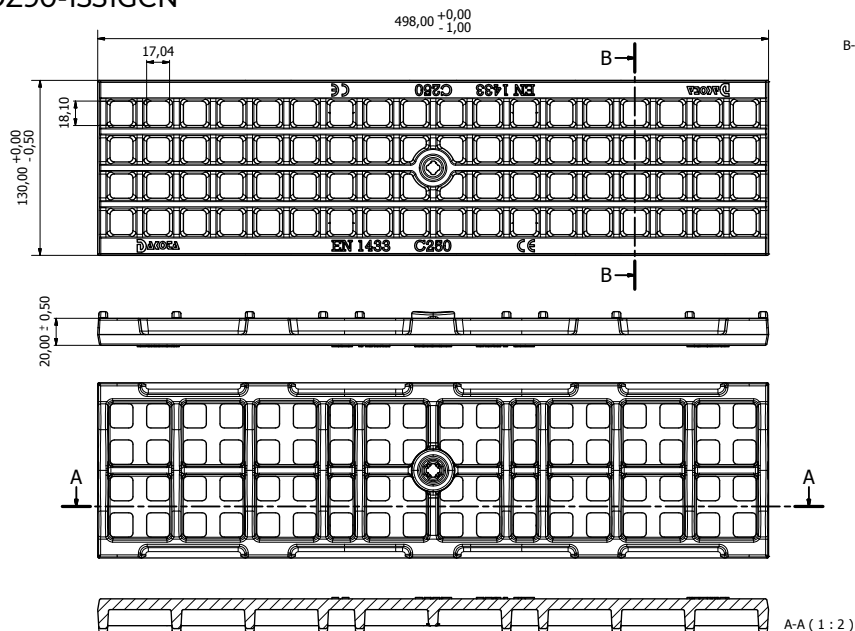

	material	weight	water passage
1351GCN	Cast iron	3,70 kg	222,07 cm ²

POZ90-1351GDN

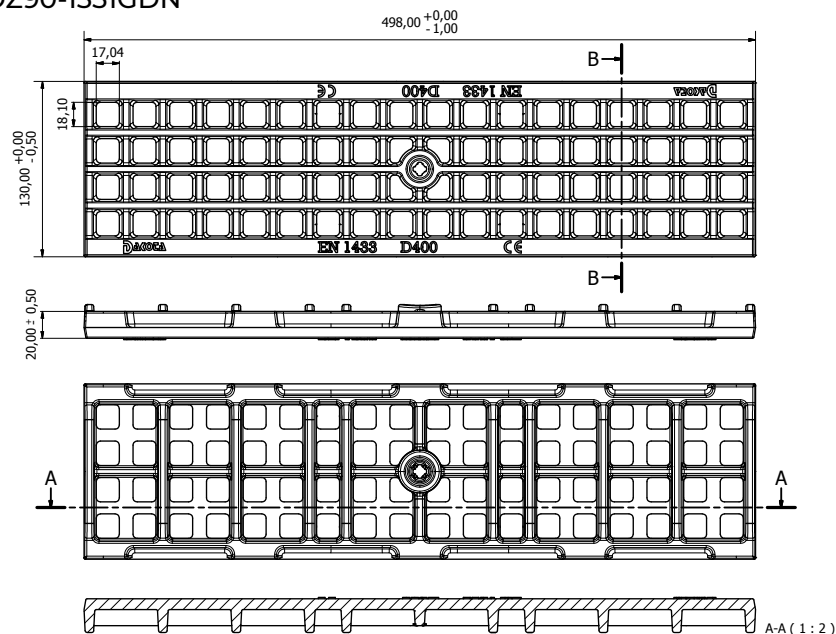

	material	weight	water passage
1351GDN	Cast iron	3,90 kg	222,07 cm ²

CAST IRON GRATING 130

2. USE

It can be used in areas that need high load capacity (heavy traffic and/or heavy vehicles passage, respecting the corresponding loading class).

3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.D.POZ90.135IGxN	Supply and installation to grating made with squared mesh design. Available loading Class: B125 - C250 - D400. Made of spheroidal cast iron. It can be used in areas that need high load capacity (heavy traffic and/or heavy vehicles passage, respecting the corresponding loading class).		
Dak.D.POZ90.135IGBN	Grating Class B125.....	pc.	-
Dak.D.POZ90.135IGCN	Grating Class C250.....	pc.	-
Dak.D.POZ90.135IGDN	Grating Class D400.....	pc.	-

CAST IRON ANTI-HEEL GRATING 130



INDEX

1. Code Registry
2. Use
3. Technical Specification

1. CODE REGISTRY


Code	Description	Dimension (mm)	Weight	Colour	Pkg. / Pallet
POZ90-1351HB	B125 Cast Iron Anti-heel Grating	130 x 500 x 20	3,20 kg/pc.	Black	1 pc. / 260 pcs
POZ90-1351HC	C250 Cast Iron Anti-heel Grating	130 x 500 x 20	3,70 kg/pc.	Black	1 pc. / 260 pcs

MATERIAL

Made of spheroidal cast iron.

CERTIFICATION

The item is engraved in accordance to EU regulation UNI 1433.

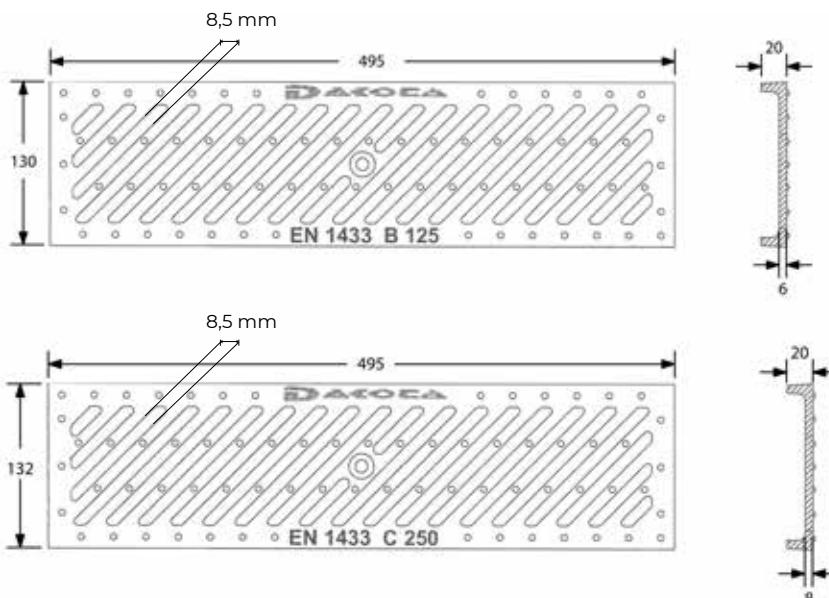

CAST IRON ANTI-HEEL GRATING 130

2. USE

It can be used in areas that need high load capacity (heavy traffic and/or heavy vehicles passage, respecting the corresponding loading class).

3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.D.POZ90.1351Hx	Supply and installation to Made with Anti-heel squared mesh design. Available loading classes: B125 - C250. Made of spheroidal cast iron. It can be used in areas that need high load capacity (heavy traffic and/or heavy vehicles passage, respecting the corresponding loading class).		
Dak.D.POZ90.1351HB	Class B125.....	pc.	-
Dak.D.POZ90.1351HC	Class C250.....	pc.	-