

POLYFIXER 500 - Pure Epoxy

Ref: rev 007

Version 18/02/2021

Features and Benefits

- High bond strength with High load resistance
- Used with all grades of threaded rod and rebar in accordance with TR029
- Ideal for deep embedment installations
- Used in non-cracked and cracked concrete
- Used in dry and wet concrete and also in wood
- Used in flooded holes
- Used for overhead applications
- ETA approved for diamond drilled holes
- Ideal for elevated temperatures - temperature ranges I, II and III
- ETA approved for rebar installations under TR023 and EN1992-1-1:2004 EC2
- Zero shrinkage enables large diameter installations
- **ETA approved for Seismic Loads C2**
- Manual cleaning up to 20mm diameter and embedment depths of 240mm
- Independently tested and approved - anchor life 100 years



BS6920 Approved
FOR USE WITH
POTABLE WATER



Contents

- PAGE 1 - Features and Benefits
- PAGE 2 - Typical characteristic and design resistance performance with 5.8 grade studding and associated installation data
- PAGE 3 to 6- Design Resistance used with various stud strengths, material and rebar.
- PAGE 7 - Characteristic and Design load resistances based on characteristic bond strengths for hef 4d (minimum embedment) to 20d
- PAGE 8 - Bond Strength Factors
- PAGE 9 - Characteristic and Design load resistances for REBAR based on characteristic bond strengths for hef 4d (minimum embedment) to 20d
- PAGE 10 - Bond Strength Factors for REBAR
- PAGE 11 - Material properties for threaded rods and rebar
- PAGE 12, 13, 14, 15,16 - Post Installed Rebar values
- PAGE 18 - Tension Edge and Spacing reduction factors
- PAGE 19- Curing Time / Temperature Range
- PAGE 20- Installation parameters: drilling hole cleaning and installation
- PAGE 21- Electric resistance and thermal conductivity



Shelf Life and Storage

This product should be stored between +5°C & +25°C.

The Shelf life of the product is 24 months from the manufacture date.

IMPORTANT The information and data given is based on our own experience, research and testing and is believed to be reliable and accurate.

However, as we cannot know the varied uses to which its products may be applied, or the methods of application used, no warranty as to the fitness or suitability of its products is given or implied. It is the users responsibility to determine suitability of use. For further information please contact Our Technical Department.

POLYFIXER 500 - Pure Epoxy

Product Description

POLYFIXER 500 is a 2 component high strength pure epoxy chemical anchoring resin system. It is designed for deep embedment and large diameter holes due to its zero shrinkage, and longer working times.

For diamond drilled holes, with rebar, and in areas of high chemical exposure eg. Seasalt and swimming pools.

Specific Benefits

- Long working times
- High loads possible
- High chemical resistance
- Use with potable water
- Fixing studs in wood
- 24 Month shelf life
- Diamond drilled holes
- Zero shrinkage
- European approved
- Fire approved
- Studs and rebar
- A+ Rating VOC content

Approvals

- ETA Option 1 ETAG 001 for cracked concrete with studs and rebar TR029
- ETA Option 1 ETAG 001 for rebar TR023 : **Approved for Seismic Loads C2**
- F120 Fire Test report • ICC-ES Approval ESR 3853
- ETA approved in flooded holes, wet and dry concrete
- Tested according to LEED 2009 EQ c4.1, SCAQMD rule 1168 (2005).
- Independently tested and approved - anchor life 100 years

Typical characteristic and design resistance performance with 5.8 grade studding and associated installation data

Stud Ø (mm)	Characteristic Resistance (kN)		Design Resistance (kN)		Recommended Load (kN)		Characteristic distances (mm)			Min Edge and Spacing (mm)	Nominal Embedment (mm)	Hole Diameter concrete (mm)	Hole Diameter fixture (mm)	Max Torque (Nm)
	Tension	Shear	Tension	Shear	Tension	Shear	Edge	Spacing	Edge					
	N _{rk}	V _{rk}	N _{rd}	V _{rd}	N _{rec}	V _{rec}	C _{cr,N}	S _{cr,N}	C _{cr,V}					
M8	19.00		12.70		9.07						60			
	19.00	9.00	12.70	7.20	9.07	5.14	80	160	80	40	80	10	9	10
	19.00		12.70		9.07						160			
M10	28.27		15.71		11.22						60			
	30.20	15.00	20.10	12.00	14.36	8.57	100	200	90	50	90	12	12	20
	30.20		20.10		14.36						200			
M12	39.58		21.99		15.71						70			
	43.80	21.00	29.20	16.80	20.86	12.00	120	240	110	60	110	14	14	40
	43.80		29.20		20.86						240			
M16	56.30		31.28		22.34						80			
	81.60	39.00	54.40	31.20	38.86	22.29	160	320	125	80	125	18	18	80
	81.60		54.40		38.86						320			
M20	73.51		35.01		25.00						90			
	127.40	61.00	84.90	48.80	60.64	34.86	200	400	180	100	170	24	22	120
	127.40		84.90		60.64						400			
M24	90.48		43.08		30.77						100			
	183.60	88.00	122.40	70.40	87.43	50.29	240	480	220	120	210	28	26	160
	183.60		122.40		87.43						480			
M27	111.97		53.32		38.08						110			
	238.00	115.00	159.10	92.00	109.52	65.71	270	540	240	135	240	32	30	180
	238.00		159.10		109.52						540			
M30	135.72		64.63		46.16						120			
	292.00	142.50	194.50	114.00	133.33	81.43	300	600	280	150	280	35	32	200
	292.00		194.50		133.33						600			
M33	148.25		70.60		50.43						130			
	342.12	173.50	162.91	138.80	116.36	99.14	330	660	310	165	300	37	36	250
	360.00		240.60		165.20						660			
M36	174.74		83.21		59.43						150			
	396.07	212.50	188.60	170.00	134.72	121.43	360	720	330	180	340	40	38	300
	425.00		283.33		202.38						720			

 = steel failure

Table notes : see back page

POLYFIXER 500 - Pure Epoxy

Design Resistance used with various stud strengths, material and rebar.

5.8 Grade Steel Studding

Stud Diameter	Hole Diameter	Embedment depth h _{ef}																				h _{ef}	F _{d,s}				
																						failure	design load				
(mm)	(mm)	60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	480	540	600	660	720	(mm)	(kN)				
8	10	12.6	12.7																				61	12.7			
10	12	15.7	18.3	20.1																			77	20.1			
12	14		22.0	25.1	28.3	29.2																	93	29.2			
16	18			31.4	35.3	39.2	43.1	47.1	51.0	54.4												139	54.4				
20	24				33.2	37.3	41.5	45.6	49.8	53.9	58.1	66.4	82.9	84.9								205	84.9				
24	28						43.0	47.3	51.6	55.9	60.2	68.8	86.0	103.2	120.4	122.4						285	122.4				
27	32								53.2	58.0	62.9	67.7	77.4	96.7	116.1	135.4	154.7	159.1					329	159.1			
30	35										64.5	69.8	75.2	86.0	107.5	128.9	150.4	171.9	194.5				362	194.5			
33	38												71.4	76.9	87.9	109.9	131.9	153.9	175.9	219.8	240.6			438	240.6		
36	40														77.6	88.7	110.8	133.0	155.2	177.4	221.7	266.0	283.2			511	283.2
Depth (mm)		60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	480	540	600	660	720						

8.8 Grade Steel Studding

Stud Diameter	Hole Diameter	Embedment depth h _{ef}																				h _{ef}	F _{d,s}	
																						failure	design load	
(mm)	(mm)	60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	480	540	600	660	720	(mm)	(kN)	
8	10	12.6	14.7	16.8	18.8	19.5																	93	19.5
10	12	15.7	18.3	20.9	23.6	26.2	28.8	30.9															118	30.9
12	14		22.0	25.1	28.3	31.4	34.5	37.7	40.8	44.0	45.0											143	45.0	
16	18			31.4	35.3	39.2	43.1	47.1	51.0	54.9	62.7	78.4	83.7								214	83.7		
20	24			33.2	37.3	41.5	45.6	49.8	53.9	58.1	66.4	82.9	99.5	116.1	130.7							315	130.7	
24	28					43.0	47.3	51.6	55.9	60.2	68.8	86.0	103.2	120.4	137.5	171.9	188.3					438	188.3	
27	32						53.2	58.0	62.9	67.7	77.4	96.7	116.1	135.4	154.7	193.4	232.1	244.8				506	244.8	
30	35							64.5	69.8	75.2	86.0	107.5	128.9	150.4	171.9	214.9	257.9	290.1	299.2			557	299.2	
33	38								71.4	76.9	87.9	109.9	131.9	153.9	175.9	219.8	263.8	296.7	329.7	362.7	370.1	674	370.1	
36	40									77.6	88.7	110.8	133.0	155.2	177.4	221.7	266.0	299.3	332.5	365.8	399.1	786	435.7	
Depth (mm)		60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	480	540	600	660	720			

Design Resistance used with various stud strengths, material and rebar.

10.9 Grade Steel Studding

Stud Diameter	Hole Diameter	Embedment depth h _{ef}																				h _{ef} failure	F _{d,s} design load			
		(mm)	(mm)	60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	480	540	600			660	720	(mm)
8	10	12.6	14.7	16.8	18.8	20.9	23.0	25.1	27.2																130	27.2
10	12	15.7	18.3	20.9	23.6	26.2	28.8	31.4	34.0	36.6	41.9	43.1													165	43.1
12	14		22.0	25.1	28.3	31.4	34.5	37.7	40.8	44.0	50.3	62.6											199	62.6		
16	18			31.4	35.3	39.2	43.1	47.1	51.0	54.9	62.7	78.4	94.1	109.8	116.6							297	116.6			
20	24			33.2	37.3	41.5	45.6	49.8	53.9	58.1	66.4	82.9	99.5	116.1	132.7	165.9	182.0						439	182.0		
24	28				43.0	47.3	51.6	55.9	60.2	68.8	86.0	103.2	120.4	137.5	171.9	206.3	232.1	257.9	262.2				610	262.2		
27	32					53.2	58.0	62.9	67.7	77.4	96.7	116.1	135.4	154.7	193.4	232.1	261.1	290.1	319.1	341.0			705	341.0		
30	35						64.5	69.8	75.2	86.0	107.5	128.9	150.4	171.9	214.9	257.9	290.1	322.4	354.6	386.8			776	416.7		
33	38							71.4	76.9	87.9	109.9	131.9	153.9	175.9	219.8	263.8	296.7	329.7	362.7	395.7			938	515.5		
36	40								77.6	88.7	110.8	133.0	155.2	177.4	221.7	266.0	299.3	332.5	365.8	399.1			1095	606.9		
Depth (mm)		60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	480	540	600	660	720					

A4-70 Stainless Steel Studding

Stud Diameter	Hole Diameter	Embedment depth h _{ef}																				h _{ef} failure	F _{d,s} design load			
		(mm)	(mm)	60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	480	540	600			660	720	(mm)
8	10	12.6	13.7																						65	13.7
10	12	15.7	18.3	20.9	21.7																				83	21.7
12	14		22.0	25.1	28.3	31.6																			100	31.6
16	18			31.4	35.3	39.2	43.1	47.1	51.0	54.9	58.8														150	58.8
20	24			33.2	37.3	41.5	45.6	49.8	53.9	58.1	66.4	82.9	91.7												221	91.7
24	28					43.0	47.3	51.6	55.9	60.2	68.8	86.0	103.2	120.4	132.1										307	132.1
27	32						53.2	58.0	62.9	67.7	77.4	80.2												166	80.2	
30	35							64.5	69.8	75.2	86.0	98.1												183	98.1	
33	38								71.4	76.9	87.9	109.9	121											221	121.3	
36	40									77.6	88.7	110.8	133.0	143										258	142.8	
Depth (mm)		60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	480	540	600	660	720					

*1 = Tensile strength 500N/mm2

Design Resistance used with various stud strengths, material and rebar.

A4-80 Stainless Steel Studding

Stud Diameter	Hole Diameter	Embedment depth h _{ef}																				h _{ef}	F _{d,s}	
																						failure	design load	
(mm)	(mm)	60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	480	540	600	660	720	(mm)	(kN)	
8	10	12.6	14.7	15.7																		75	15.7	
10	12		18.3	20.9	23.6	24.8																95	24.8	
12	14		22.0	25.1	28.3	31.4	34.5	36.1													115	36.1		
16	18			31.4	35.3	39.2	43.1	47.1	51.0	54.9	62.7	67.2								171	67.2			
20	24			33.2	37.3	41.5	45.6	49.8	53.9	58.1	66.4	82.9	99.5	104.8							253	104.8		
24	28					43.0	47.3	51.6	55.9	60.2	68.8	86.0	103.2	120.4	132.1							2	307	132.1
27	32						53.2	58.0	62.9	67.7	77.4	80.2								1	166	80.2		
30	35							64.5	69.8	75.2	86.0	98.1							1	183	98.1			
33	38								71.4	76.9	87.9	109.9	121.3						1	221	121.3			
36	40									77.6	88.7	110.8	133.0	142.8							1	258	142.8	
Depth (mm)		60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	480	540	600	660	720			

High bond reinforcing bars Fyk=500N/mm2

Rebar Diameter	Hole Diameter	Embedment depth h _{ef}																				h _{ef} failure	F _{d,s} yield load			
		(mm)	(mm)	60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	500	560	640			720	800	(mm)
8	10	11.7	13.7	15.6	17.6	19.6	21.5	21.9																	112	21.9
10	12	14.7	17.1	19.6	22.0	24.4	26.9	29.3	31.8	34.1															140	34.1
12	15		19.1	21.8	24.5	27.2	30.0	32.7	35.4	38.1	43.6	49.2													181	49.2
16	20			26.8	30.2	33.5	36.9	40.2	43.6	46.9	53.6	67.0	80.4	87.6											261	87.6
20	25			28.7	32.3	35.9	39.5	43.1	46.7	50.3	57.5	71.9	86.2	100.5	114.9	136.6									380	136.6
25	30				41.1	45.3	49.4	53.5	57.6	65.8	82.3	98.7	115.2	131.7	164.6	205.7							519	213.5		
28	35					50.7	55.3	59.9	64.5	73.7	92.2	110.6	129.0	147.5	184.3	230.4	258.1						581	267.8		
32	40						68.5	73.7	84.3	105.3	126.4	147.5	168.5	210.7	263.3	294.9	337.1					664	349.7			
36	44							79.2	90.5	113.1	135.7	158.4	181.0	226.0	282.8	316.7	362.0	407.2				823	443.5			
40	50								95.8	119.7	143.6	167.6	191.5	239.4	299.2	335.1	383.0	430.9	478.8			913	546.3			
Depth (mm)		60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	500	560	640	720	800					

*1 = Tensile strength 500N/mm2
*2 = Tensile strength 700N/mm2

Design Resistance used with various stud strengths, material and rebar.

High bond reinforcing bars $F_{yk}=420N/mm^2$

High bond reinforcing bars $F_{yk}=420N/mm^2$																						$F_{d,s}$	
Rebar	Hole																					h_{ef}	yield
Diameter	Diameter	Embedment depth h_{ef}																				failure	load
(mm)	(mm)	60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	500	560	640	720	800	(mm)	(kN)
8	10	11.7	13.7	15.6	17.6	18.4																94	18.4
10	12	14.7	17.1	19.6	22.0	24.4	26.9	28.7														117	28.7
12	15		19.1	21.8	24.5	27.2	30.0	32.7	35.4	38.1	41.3											152	41.3
16	20			26.8	30.2	33.5	36.9	40.2	43.6	46.9	53.6	67.0	73.4								219	73.4	
20	25			28.7	32.3	35.9	39.5	43.1	46.7	50.3	57.5	71.8	86.2	100.5	114.8							320	114.8
25	30					41.1	45.3	49.4	53.5	57.6	65.8	82.3	98.7	115.2	131.7	164.6	179.3					436	165.1
28	35						50.7	55.3	59.9	64.5	73.7	92.2	110.6	129.0	147.5	184.3	225.0				488	225.0	
32	40								68.5	73.7	84.3	105.3	126.4	147.5	168.5	210.7	263.3	293.7			558	293.7	
36	44									75.4	86.2	107.7	129.3	150.8	172.4	215.5	269.3	301.6	344.7	372.5	692	372.5	
40	50										95.8	119.7	143.6	167.6	191.5	239.4	299.2	335.1	383.0	430.9	458.9	767	458.9
Depth (mm)		60	70	80	90	100	110	120	130	140	160	200	240	280	320	400	500	560	640	720	800		

POLYFIXER 500 - Pure Epoxy

Characteristic and Design Load resistances based on characteristic bond strengths for hef 4d (minimum embedment) to 20d

Stud Ø (mm)		Non Cracked Concrete						Cracked Concrete						Nominal Embed- ment (mm)					
		Characteristic Resistance (kN)		Design Resistance (kN)		Recommended Load (kN)		Characteristic Resistance (kN)		Design Resistance (kN)		Recommended Load (kN)							
		Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear						
		N _{rk}	V _{rk}	N _{rd}	V _{rd}	N _{rec}	V _{rec}			N _{rk}	V _{rk}	N _{rd}	V _{rd}	N _{rec}	V _{rec}				
M8		22.62	9.00	12.57	7.20	8.98	5.14	Not Applicable		Not Applicable		Not Applicable				60			
		30.16		16.76		11.97										80			
		60.32		33.51		23.94										160			
M10		28.27	15.00	15.71	12.00	11.22	8.57											60	
		42.41		23.56		16.83												90	
		94.25		52.36		37.40												200	
M12		39.58	21.00	21.99	16.80	15.71	12.00	19.79	21.00	11.00	16.80	7.85	12.00	70					
		62.20		34.56		24.68		31.10		17.28		12.34		110					
		135.72		75.40		53.86		67.86		37.70		26.93		240					
M16		56.30	39.00	31.28	31.20	22.34	22.29	26.14	39.00	14.52	31.20	10.37	22.29	80					
		87.96		48.87		34.91		42.22		23.46		16.75		125					
		225.19		125.11		89.36		104.55		58.08		41.49		320					
M20		73.51	61.00	35.01	48.80	25.00	34.86	33.93	61.00	16.16	48.80	11.54	34.86	90					
		138.86		66.12		47.23		63.90		30.41		21.72		170					
		326.73		155.58		111.13		150.80		71.81		51.29		400					
M24		90.48	88.00	43.08	70.40	30.77	50.29	41.47	88.00	19.75	70.40	14.11	50.29	100					
		190.00		90.48		64.63		85.50		40.71		29.10		210					
		434.29		206.81		147.72		199.05		94.79		67.70		480					
M27		111.97	115.00	53.32	92.00	38.08	65.71	51.32	115.00	24.44	92.00	17.46	65.71	110					
		244.29		116.33		83.09		107.49		51.18		36.56		240					
		549.65		261.74		186.96		251.92		119.96		85.69		540					
M30		135.72	142.50	64.63	114.00	46.16	81.43	62.20	142.50	29.62	114.00	21.16	81.43	120					
		316.67		150.80		107.71		133.00		63.33		45.24		280					
		678.59		323.14		230.81		311.02		148.10		105.79		600					
M33		148.25	173.50	70.60	138.80	50.43	99.14	67.39	173.50	32.09	138.80	22.92	99.14	130					
		342.12		162.91		116.37		140.27		66.80		47.71		300					
		752.66		358.41		256.01		342.12		162.91		116.37		660					
M36		174.74	212.50	83.21	170.00	59.43	121.43	76.34	212.50	36.35	170.00	25.97	121.43	150					
		396.07		188.60		134.72		154.47		73.56		52.54		340					
		838.73		399.40		285.28		366.44		174.49		124.64		720					

Table notes : see back page

POLYFIXER 500 - Pure Epoxy

Bond Strength Factors

Influence of concrete strength on combined pull out and concrete cone resistance

Concrete Strength N/mm ² (Mpa)	C15/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
f_c =	0.98	1.00	1.02	1.04	1.06	1.08	1.09	1.10

Influence of environmental conditions in non cracked concrete

		M8	M10	M12	M16	M20	M24	M27	M30	M33	M36
Temp I 40°C / 24°C	Dry and Wet	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	Flooded	1.00	0.94	0.87	0.79	0.71	0.65	0.65	0.60	0.57	0.55
Temp II 60°C / 43°C	Dry and Wet	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65
	Flooded	0.65	0.63	0.61	0.59	0.57	0.54	0.50	0.49	0.46	0.44
Temp III 72°C / 43°C	Dry and Wet	0.57	0.56	0.54	0.53	0.52	0.51	0.50	0.49	0.47	0.46
	Flooded	0.57	0.54	0.52	0.51	0.50	0.49	0.46	0.45	0.43	0.42

Influence of environmental conditions in cracked concrete

		M8	M10	M12	M16	M20	M24	M27	M30	M33	M36
Temp I 40°C / 24°C	Dry and Wet	n/a	n/a	0.50	0.48	0.46	0.45	0.44	0.42	0.41	0.39
	Flooded	n/a	n/a	0.50	0.42	0.38	0.38	0.35	0.30	0.27	0.24
Temp II 60°C / 43°C	Dry and Wet	n/a	n/a	0.32	0.31	0.30	0.29	0.29	0.28	0.27	0.26
	Flooded	n/a	n/a	0.32	0.29	0.28	0.27	0.27	0.25	0.24	0.23
Temp III 72°C / 43°C	Dry and Wet	n/a	n/a	0.27	0.27	0.26	0.25	0.24	0.23	0.23	0.22
	Flooded	n/a	n/a	0.27	0.27	0.26	0.25	0.24	0.23	0.23	0.22

Table notes : see back page

pg 8

POLYFIXER 500 - Pure Epoxy

Characteristic and Design Load resistances for REBAR based on characteristic bond strengths for *hef 4d (min embedment) to 20d*

	Non Cracked Concrete						Cracked Concrete												
	Characteristic Resistance (kN)		Design Resistance (kN)		Recommended Load (kN)		Characteristic Resistance (kN)		Design Resistance (kN)		Recommended Load (kN)		Nominal Embed-ment						
Rebar Ø (mm)	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear	(mm)						
	N _{rk}	V _{rk}	N _{rd}	V _{rd}	N _{rec}	V _{rec}	N _{rk}	V _{rk}	N _{rd}	V _{rd}	N _{rec}	V _{rec}							
8	21.11	13.95	11.73	9.30	8.38	6.64	Not Applicable		Not Applicable		Not Applicable		60						
	28.15		15.64		11.17								80						
	56.30		31.30		22.34								160						
10	26.39	21.45	14.66	14.30	10.47	10.21							Not Applicable		Not Applicable		Not Applicable		60
	39.58		21.99		15.71														90
	87.96		48.87		34.91														200
12	34.31	31.05	19.06	20.70	13.61	14.79	19.79	31.05	11.00	20.70	7.85	14.79							70
	53.91		29.95		21.39		31.10		17.28		12.34								110
	117.62		65.35		46.68		67.86		37.70		26.93								240
16	48.25	55.50	26.81	37.00	19.15	26.43	26.14	55.50	14.52	37.00	10.37	26.43	80						
	75.40		41.89		29.92		40.84		22.69		16.21		125						
	193.02		107.23		76.60		104.55		58.08		41.49		320						
20	67.86	86.55	32.31	57.70	23.08	41.21	33.93	86.55	16.16	57.70	11.54	41.21	90						
	128.18		61.04		43.60		64.09		30.52		21.80		170						
	301.59		143.62		102.58		150.80		71.81		51.29		400						
25	86.39	135.00	41.14	90.00	29.39	64.29	43.20	135.00	20.57	90.00	14.69	64.29	100						
	181.43		86.39		61.71		90.71		43.20		30.86		210						
	431.97		205.70		146.93		215.99		102.85		73.46		500						
28	108.37	168.75	51.61	112.50	36.86	80.36	54.19	168.75	25.80	112.50	18.43	80.36	112						
	270.93		129.02		92.15		135.47		64.51		46.08		280						
	541.86		258.03		184.31		270.93		129.02		92.15		560						
32	141.55	220.95	67.40	147.30	48.15	105.21	70.77	220.95	33.70	147.30	24.07	105.21	128						
	353.87		168.51		120.36		176.93		84.25		60.18		320						
	707.74		337.02		240.73		353.87		168.51		120.36		640						

Table notes : see back page

POLYFIXER 500 - Pure Epoxy

Bond Strength Factors - REBAR

Influence of concrete strength on combined pull out and concrete cone resistance

Concrete Strength N/mm2 (MPa)	C15/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
f_c =	0.98	1.00	1.02	1.04	1.06	1.08	1.09	1.10
Concrete Strength N/mm2 (MPa)	C55/67	C60/75	C70/85	C80/96	C90/105	-	-	-
f_c =	1.10	1.12	1.13	1.14	1.15	-	-	-

Influence of environmental conditions in non cracked concrete

		Ø 8	Ø 10	Ø 12	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Temp I 40°C / 24°C	Dry and Wet	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	Flooded	1.00	0.94	0.90	0.85	0.80	0.71	0.65	0.63
Temp II 60°C / 43°C	Dry and Wet	0.67	0.65	0.63	0.62	0.61	0.60	0.60	0.59
	Flooded	0.65	0.64	0.61	0.59	0.58	0.56	0.55	0.47
Temp III 72°C / 43°C	Dry and Wet	0.60	0.58	0.57	0.56	0.56	0.55	0.54	0.53
	Flooded	0.58	0.56	0.53	0.50	0.47	0.45	0.43	0.41

Influence of environmental conditions in cracked concrete

		Ø 8	Ø 10	Ø 12	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Temp I 40°C / 24°C	Dry and Wet	n/a	n/a	0.55	0.47	0.44	0.43	0.42	0.41
	Flooded	n/a	n/a	0.55	0.42	0.40	0.38	0.36	0.35
Temp II 60°C / 43°C	Dry and Wet	n/a	n/a	0.30	0.28	0.26	0.24	0.23	0.23
	Flooded	n/a	n/a	0.30	0.27	0.25	0.23	0.22	0.22
Temp I 72°C / 43°C	Dry and Wet	n/a	n/a	0.30	0.26	0.25	0.24	0.23	0.22
	Flooded	n/a	n/a	0.30	0.26	0.24	0.23	0.23	0.22

Table notes : see back page

POLYFIXER 500 - Pure Epoxy

Material Properties for grades of other threaded rod and rebar

	Stud Grade 8.8		Stud Grade 10.9		Stud Grade A4-70		Stud Grade A4-80	
Stud Diameter (mm)	N _{rk, s}	N _{rd, s}	N _{rk, s}	N _{rd, s}	N _{rk, s}	N _{rd, s}	N _{rk, s}	N _{rd, s}
	(kN)	(kN)	(kN)	(kN)	(kN)	(kN)	(kN)	(kN)
M8	29.2	19.5	38.1	27.2	25.6	13.7	29.2	15.6
M10	46.4	30.9	60.3	43.1	40.6	21.7	46.4	24.8
M12	67.4	44.9	87.7	62.6	59.0	31.6	67.4	36.0
M16	125.6	83.7	163.0	116.4	109.9	58.8	125.7	67.2
M20	196.1	130.7	255.0	182.1	171.5	91.7	196.0	104.8
M24	282.5	188.3	367.0	262.1	247.1	132.1	293.0	132.1
M27	367.0	244.7	477.4	341.0	229.4	80.2	229.4	80.2
M30	448.8	299.2	583.0	416.4	280.6	98.1	280.6	98.1
M33	555.2	370.1	721.8	515.5	347.0	121.3	347.0	121.3
M36	653.6	435.7	849.7	606.9	408.4	142.8	408.4	142.8

	Stud Grade 8.8		Stud Grade 10.9		Stud Grade A4-70		Stud Grade A4-80	
Stud Diameter (mm)	V _{rk, s}	V _{rd, s}	V _{rk, s}	V _{rd, s}	V _{rk, s}	V _{rd, s}	V _{rk, s}	V _{rd, s}
	(kN)	(kN)	(kN)	(kN)	(kN)	(kN)	(kN)	(kN)
M8	14.6	11.7	19.0	12.7	12.8	8.2	14.6	9.4
M10	23.2	18.6	30.2	20.1	20.3	13.0	23.2	14.9
M12	33.7	27.0	43.8	29.2	29.5	18.9	33.7	21.6
M16	62.8	50.2	81.6	54.4	55.0	35.2	62.8	40.3
M20	98.0	78.4	127.4	84.9	85.8	55.0	98.0	62.8
M24	141.2	113.0	183.6	122.4	123.6	79.2	141.2	90.5
M27	183.5	146.8	238.7	191.0	114.7	48.4	114.7	48.4
M30	224.4	179.5	291.5	194.3	140.3	89.9	140.3	89.9
M33	277.6	222.1	360.9	288.7	173.5	111.2	173.5	111.2
M36	326.8	261.4	424.8	283.2	204.2	130.9	204.2	130.9

	Rebar BSt 500 to DIN 488		Rebar BSt 500 to DIN 488	
Rebar Diameter (mm)	N _{rk, s}	N _{rd, s}	V _{rk, s}	V _{rd, s}
	(kN)	(kN)	(kN)	(kN)
8	28.0	20.0	14.0	9.3
10	43.0	30.7	21.5	14.3
12	62.0	44.3	31.0	20.7
14	85.0	60.7	42.5	28.3
16	111.0	79.3	55.5	37.0
18	140.0	100.0	70.0	46.7
20	173.0	123.6	86.5	57.7
22	209.0	149.3	104.5	69.7
25	270.0	192.9	135.0	90.0
28	339.0	242.1	169.0	112.7
32	442	315.7	221	147.3
36	563.2	402.3	281.6	187.7
40	693.8	495.6	346.9	231.3

Table notes : see back page

POLYFIXER 500 - Pure Epoxy

Post installed rebar connections

Minimum anchorage length ¹⁾ and lap splice length for C20/25 and maximum installation length (l_{max})

Rebar		$l_{b,min}$ (mm)	$l_{0,min}$ (mm)	$l_{max,min}$ (mm)
$\varnothing d_s$	$f_{y,k}$ (N/mm ²)			
8mm	500	113	200	1000
10mm	500	142	200	1000
12mm	500	170	200	1200
14mm	500	198	210	1400
16mm	500	227	240	1600
20mm	500	284	300	2000
22mm	500	312	330	2000
24mm	500	340	360	2000
25mm	500	354	375	2000
28mm	500	397	420	2000
32mm	500	454	480	2000
34mm	500	482	510	2000
36mm	500	534	540	2000
40mm	500	621	600	2000

N/mm² = MPa

1) According to EN 1992-1-1:2004 $l_{b,min}$ (8.6) and $l_{0,min}$ (8.11) for good bond conditions and $a_g = 1,0$
with maximum yield stress for rebar B500 B and $\gamma_M = 1,15$

Design values of the ultimate bond resistance f_{bd} ¹⁾ in N/mm² for all drilling methods for good conditions

Rebar $\varnothing$	Concrete Class								
$\varnothing d_s$	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/60	C50/60
8mm to 32mm	1.6	2	2.3	2.7	3	3.4	3.7	4	4.3
34mm	1.6	2	2.3	2.6	2.9	3.3	3.6	3.9	4.2
36mm	1.5	1.9	2.2	2.6	2.9	3.3	3.6	3.8	4.1
40mm	1.5	1.8	2.1	2.5	2.8	3.1	3.4	3.7	4

1) Tabulated values for f_{bd} are valid for good bond condition according to EN1992-1-1:2004. For all other bond conditions multiply the values for f_{bd} by 0.7.

POLYFIXER 500 - Pure Epoxy

Post installed rebar connections

Values for pre-calculation of anchoring

Rebar - Ø ds	$\alpha_1=\alpha_2=\alpha_3=\alpha_4=\alpha_5=1.0$			α_2 or $\alpha_5=0.7$; $\alpha_1=\alpha_3=\alpha_4=1.0$		
	Anchorage length l_{bd}	Design value N_{rd}	Mortar volume	Anchorage length l_{bd}	Design value N_{rd}	Mortar volume
(mm)	(mm)	(kN)	(ml)	(mm)	(kN)	(ml)
8	113*	6.53	9	113*	9.33	9
	180	10.4	14	150	12.39	11
	250	14.45	19	190	15.69	14
	378	21.85	29	265	21.88	20
10	142*	10.26	13	142*	14.66	13
	220	15.9	20	190	19.61	17
	310	22.4	28	240	24.77	22
	390	28.18	35	280	28.9	25
12	473	34.18	43	331	34.17	30
	170*	14.74	18	170*	21.06	18
	270	23.41	29	230	28.49	24
	370	32.08	39	280	34.68	30
14	470	40.75	50	340	42.12	36
	567	49.16	60	397	49.18	42
	198*	20.03	24	198*	28.61	24
	310	31.36	37	260	37.57	31
16	430	43.5	52	330	47.69	40
	550	55.64	66	400	57.81	48
	662	66.97	80	463	66.91	56
	227*	26.24	31	227*	37.49	31
20	360	41.62	49	300	49.55	41
	490	56.65	67	380	62.76	52
	620	71.68	84	450	74.32	61
	756	87.4	103	529	87.37	72
22	284*	41.04	60	284*	58.63	60
	450	65.03	95	380	78.45	81
	610	88.15	129	470	91.03	100
	780	112.72	165	570	117.68	121
24	945	136.57	200	662	136.67	140
	312*	49.6	88	312*	70.85	88
	490	77.89	139	420	95.38	119
	680	108.1	192	520	118.09	147
25	860	136.71	243	620	140.8	175
	1040	165.32	294	728	165.32	206
	340*	58.96	144	340*	84.23	144
	540	93.64	228	450	111.8	190
	740	128.33	312	570	141.21	241
	940	163.01	397	680	168.46	287
	1134	196.65	479	794	196.7	335
	354*	63.95	133	354*	91.35	133
	560	101.16	211	470	121.29	177
	770	139.09	290	590	152.26	222
	970	175.22	365	710	183.22	267
	1181	213.34	444	827	213.42	311

Example For:

C20/25;
good bond condition;
Rebar Yield Strength
500 N/mm² (500 MPa)

Continued

* Minimum anchorage length. The design value is valid for "good bond conditions" according to EN 1992-1-1.

All other condition: multiply value by 0.7. Mortar volume based on equation: $V = 1.2 \cdot (d_o^2 - d_d^2) \cdot \pi \cdot l_b / 4$

Values for pre-calculation of anchoring

28	397	80.33	165	397*	114.78	165
	600	121.41	249	600	173.49	249
	840	169.97	349	840	242.88	349
	1120	226.63	466			
	1323	267.70	550	926	267.75	385
32	454	104.99	246	454*	149.8	246
	640	148.00	347	640	211.34	347
	960	222.00	521	960	317	521
	1280	296.00	695			
	1512	349.65	821	1059	349.7	575
34	482	118.43	395	482*	169.2	395
	680	167.08	557	680	238.7	557
	1020	250.62	835	1020	358	835
	1360	334.16	1114			
	1607	394.85	1316	1125	394.9	921
36	534	132.88	367	534*	189.7	367
	720	179.17	495	720	255.95	495
	1080	268.75	742	1080	383.9	742
	1440	358.34	989			
	1780	442.95	1222	1191	423.4	818
40	621	163.90	834	621*	234.2	834
	800	211.14	1074	800	301.7	1074
	1200	316.71	1612	1200	452.5	1612
	1600	422.28	2149			
	2070	546.33	2781	1323	498.9	1777

POLYFIXER 500 - Pure Epoxy

Post installed rebar connections

Values for pre-calculation of overlap joints

Rebar - Ø ds	$\alpha_1=\alpha_2=\alpha_3=\alpha_4=\alpha_5=1.0$			α_2 or $\alpha_5=0.7$; $\alpha_1=\alpha_3=\alpha_4=1.0$		
	Anchorage length l_{bd}	Design value N_{rd}	Mortar volume	Anchorage length l_{bd}	Design value N_{rd}	Mortar volume
(mm)	(mm)	(kN)	(ml)	(mm)	(kN)	(ml)
8	200	11.56	15	200	16.52	15
	240	13.87	18	220	18.17	17
	290	16.76	22	230	18.99	17
	378	21.85	29	265	21.88	20
10	200	14.45	18	200	20.64	18
	270	19.51	24	230	23.74	21
	340	24.57	31	270	27.87	24
	400	28.9	36	300	30.97	27
12	473	34.18	43	331	34.17	30
	200	17.34	21	200	24.77	21
	290	25.15	31	250	30.97	26
	380	32.95	40	300	37.16	32
14	480	41.62	51	350	43.35	37
	567	49.16	60	397	49.18	42
	210	21.24	25	210	30.35	25
	320	32.37	39	270	39.02	33
16	440	44.51	53	340	49.13	41
	550	55.64	66	400	57.81	48
	662	66.97	80	463	66.91	56
	240	27.75	33	240	39.64	33
20	370	42.78	50	310	51.2	42
	500	57.81	68	380	62.76	52
	630	72.83	86	460	75.97	62
	756	87.4	103	529	87.37	72
22	300	43.35	64	300	61.93	64
	460	66.48	98	390	80.51	83
	620	89.6	131	480	99.09	102
	780	112.72	165	570	117.68	121
24	945	136.57	200	662	136.67	140
	330	52.46	93	330	74.94	93
	510	81.07	144	430	97.65	122
	680	108.1	192	530	120.36	150
25	860	136.71	243	630	143.07	178
	1040	165.32	294	728	165.32	206
	360	62.43	152	360	89.19	152
	550	95.38	232	470	116.44	198
25	750	130.06	317	580	143.69	245
	940	163.01	397	690	170.94	291
	1134	196.65	479	794	196.7	335
	375	67.74	141	375	96.77	141
25	580	104.77	218	490	126.45	184
	780	140.9	293	600	154.84	226
	980	177.03	369	710	183.22	267
	1181	213.34	444	827	213.42	311

Example For:

C20/25;
good bond condition;
Rebar Yield Strength
500 N/mm² (500 MPa)

* Minimum anchorage length. The design value is valid for "good bond conditions" according to EN 1992-1-1.

All other condition: multiply value by 0.7. Mortar volume based on equation: $V = 1.2 \cdot (d_o^2 - d_a^2) \cdot \pi \cdot l_b / 4$

Values for pre-calculation of overlap joints

28	420	84.98	175	420*	121.4	175
	600	121.41	249	600	173.49	249
	840	169.97	349	840	242.88	349
	1120	226.63	466			
	1323	267.70	550	926	267.75	385
32	480	111.00	261	480*	158.5	261
	640	148.00	347	640	211.34	347
	960	222.00	521	960	317	521
	1280	296.00	695			
	1512	349.65	821	1059	349.7	575
34	510	125.31	418	510*	179	418
	680	167.08	557	680	238.7	557
	1020	250.62	835	1020	358	835
	1360	334.16	1114			
	1607	394.85	1316	1125	394.9	921
36	540	134.38	371	540*	191.97	371
	720	179.17	495	720	255.95	495
	1080	268.75	742	1080	383.9	742
	1440	358.34	989			
	1780	442.95	1222	1191	423.4	818
40	621	163.90	834	621*	234.2	834
	800	211.14	1074	800	301.7	1074
	1200	316.71	1612	1200	452.5	1612
	1600	422.28	2149			
	2070	546.33	2781	1323	498.9	1777

POLYFIXER 500 - Pure Epoxy

Post installed rebar schematics

Application examples of post-installed rebar

Figure 1: Overlap joints in slabs and beams.

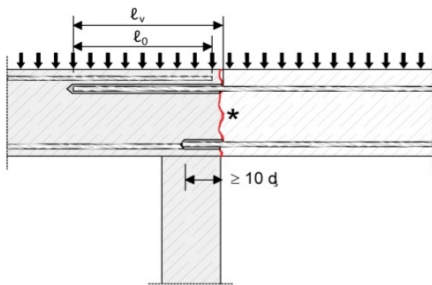


Figure 2: Overlap joint in foundation of a column or wall where the rebars are stressed in tension.

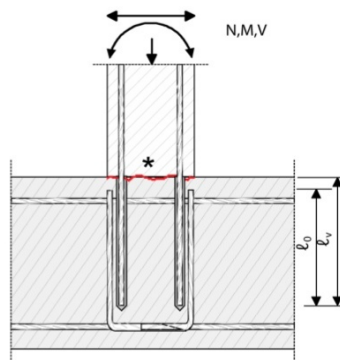


Figure 3: End anchoring of slabs or beams, designed as simply supported.

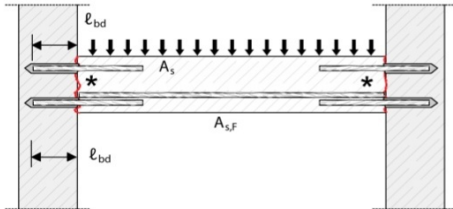


Figure 4: Rebar connection of components stressed primarily in compression. The rebar are stressed in compression.


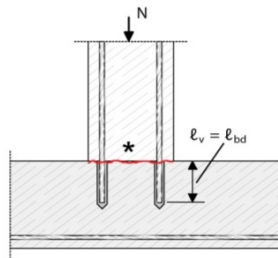


Figure 5: Anchoring of reinforcement to cover the line of acting tensile force.

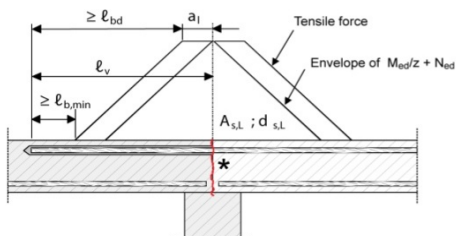

Note to figure 1 to 5 :

In the figures no transverse reinforcement is plotted, the transverse reinforcement as required by EC 2 shall be present. The shear transfer between old and new concrete shall be designed according to EC2. Description of the bonded-in rebars and overlap joints see Annex 4 and 5.

*** Roughened joint**

POLYFIXER 500 - Pure Epoxy

Effect of Anchor Spacing - Tension

Anchor Spacing	Stud / Rebar Diameter											
(mm)	8	10	12	16	20	24	27	30	33	36	40	
40	0.64											
50	0.67	0.63										
60	0.70	0.65	0.63									
70	0.73	0.67	0.64									
80	0.76	0.69	0.66	0.63								
90	0.79	0.72	0.68	0.64								
100	0.82	0.74	0.70	0.65	0.63							
120	0.87	0.79	0.74	0.68	0.65	0.63	0.63					
150	0.96	0.86	0.80	0.73	0.68	0.65	0.64	0.63				
160	1.00	0.88	0.82	0.74	0.70	0.66	0.65	0.63	0.63	0.63	0.63	
175		0.92	0.85	0.76	0.71	0.67	0.66	0.64	0.63	0.63	0.63	
200		1.00	0.90	0.80	0.74	0.69	0.69	0.66	0.65	0.65	0.65	
225			0.95	0.84	0.77	0.72	0.71	0.68	0.67	0.67	0.66	
240			1.00	0.86	0.79	0.73	0.72	0.69	0.68	0.68	0.67	
250				0.87	0.80	0.74	0.73	0.70	0.69	0.68	0.68	
275				0.91	0.83	0.76	0.75	0.72	0.71	0.70	0.69	
280				0.92	0.84	0.77	0.76	0.73	0.71	0.70	0.69	
300				0.95	0.86	0.79	0.78	0.74	0.73	0.72	0.71	
320				1.00	0.88	0.81	0.80	0.76	0.74	0.73	0.72	
350					0.92	0.83	0.82	0.78	0.77	0.75	0.73	
400					1.00	0.88	0.87	0.82	0.80	0.78	0.76	
440						0.92	0.91	0.85	0.83	0.81	0.79	
480						1.00	0.94	0.88	0.86	0.84	0.81	
540							1.00	0.93	0.91	0.88	0.84	
600								1.00	0.96	0.92	0.88	
660									1.00	0.96	0.91	
720										1.00	0.95	
800											1.00	

Effect of Edge Distance - Tension

Edge Distance	Stud / Rebar Diameter										
(mm)	8	10	12	16	20	24	27	30	33	36	40
40	0.64										
50	0.73	0.63									
60	0.82	0.70	0.63								
70	0.90	0.77	0.68								
80	1.00	0.84	0.74	0.63							
90		0.91	0.80	0.67							
100		1.00	0.86	0.71	0.63						
110			0.92	0.76	0.66						
120			1.00	0.80	0.70	0.64					
140				0.89	0.77	0.67	0.63	0.63			
160				1.00	0.84	0.72	0.70	0.65	0.63	0.67	
180					0.91	0.78	0.75	0.70	0.66	0.71	0.68
200					1.00	0.84	0.81	0.76	0.71	0.74	0.71
220						0.89	0.86	0.81	0.75	0.78	0.75
240						1.00	0.92	0.86	0.80	0.82	0.78
270							1.00	0.94	0.87	0.87	0.83
300								1.00	0.94	0.93	0.88
330									1.00	0.98	0.93
360										1.00	0.98
400											1.00

Effect of Edge Distance - Shear

Edge	Stud / Rebar Diameter										
(mm)	8	10	12	16	20	24	27	30	33	36	40
40	0.25										
50	0.44	0.30									
60	0.63	0.48	0.30								
70	0.81	0.65	0.44								
80	1.00	0.83	0.58	0.40							
90		1.00	0.72	0.53							
100			0.86	0.67	0.35						
110			1.00	0.80	0.44						
125				1.00	0.58	0.35					
140					0.72	0.46	0.35	0.30			
160					0.91	0.62	0.51	0.35	0.32	0.33	
180					1.00	0.77	0.63	0.46	0.37	0.43	
200						0.92	0.75	0.57	0.46	0.50	0.32
220						1.00	0.88	0.68	0.56	0.56	0.53
240							1.00	0.78	0.65	0.63	0.59
280								1.00	0.84	0.77	0.72
310									1.00	1.00	0.82
330										1.00	0.89
400											1.00

POLYFIXER 500 - Pure Epoxy

Minimum Curing Time

Concrete Temperature	Gel - Working Time	Minimum curing time in dry concrete	Minimum curing time in wet concrete
5°C	120 min	3000 min	x 2
15°C	60 min	1200 min	x 2
25°C	25 min	480 min	x 2
35°C	16 min	240 min	x 2
40°C	10 min	150 min	x 2

- Full cure 24 hours

- All specifications based on supplied mixer

Temperature Ranges

Temperature Range	Concrete Service Temperature	Maximum Long Term Concrete Temp	Maximum Short Term Concrete Temp
Range I	-40°C to +40°C	+24°C	+40°C
Range II	-40°C to +60°C	+43°C	+60°C
Range III	-40°C to +72°C	+43°C	+72°C

Service temperature range: Range of ambient temperatures after installation and during the lifetime of the anchor.

Short term temperature: Temperatures within the service temperature range which vary over short intervals, e.g. day/night cycles and freeze/thaw cycles.

Long term temperature: Temperature, within the service temperature range, which will be approximately constant over significant periods of time.





Long term temperatures will include constant or near constant temperatures, such as those experienced in cold stores or next to heating installations.

Physical Properties

	N/mm ² (MPa)	Test Method
Tensile Strength	29.36	ASTM D638
Compressive Strength	120	EN 196 Part 1
Flexural Strength	39	EN 196 Part 1
Flexural Modulus	3706	ASTM D790
E Modulus	3420	EN 196 Part 1
Density	1.42 kg/dm ³	-
Shrinkage	< 0.4%	-
VOC Content	A+ Rating	




POLYFIXER 500 - Pure Epoxy

Installation parameters: drilling hole cleaning and installation







Drill hole in the substrate to the required embedment depth using the appropriately sized carbide drill bit. Bore hole cleaning Just before setting an anchor, the bore hole must be free of dust and debris. The manual pump shall be used for blowing out bore holes up to diameters $\leq 24\text{mm}$ and embedment depths up to $\text{hef} \leq 10d$. Blow out at least 4 times from the back of the bore hole, using an extension if needed. Brush 4 times with the specified brush size (see Table 6) by inserting the steel brush to the back of the hole (if needed with an extension) in a twisting motion and removing it. Blow out again with manual pump at least 4 times.




Compressed air cleaning (CAC) for all bore hole diameters do and all bore hole depths



Blow 2 times from the back of the hole (if needed with a nozzle extension) over the whole length with oil-free compressed air (min. 6 bar at $6 \text{ m}^3/\text{h}$). Brush 2 times with the specified brush size (see Table 6) by inserting the steel brush to the back of the hole (if needed with an extension) in a twisting motion and removing it.
X 2 Blow out again with compressed air at least 2 times.



Remove the threaded cap from the cartridge. Tightly attach the mixing nozzle. Do not modify the mixer in any way. Made sure the mixing element is inside the mixer. Use only the supplied mixer. Insert the cartridge into the dispenser gun. Discard the initial trigger pulls of adhesive. Discard the first 10ml of resin.



Inject the adhesive starting at the back of the hole, slowly withdrawing the mixer with each trigger pull. Fill holes approximately 2/3 full, to ensure that the annular gap between the anchor and the concrete is completely filled with adhesive along the embedment depth. Before use, verify that the threaded rod is dry and free of contaminants. Install the threaded rod to the required embedment depth during the open gel time t_{gel} has elapsed. The working time t_{gel} is given in Table 7. The anchor can be loaded after the required curing time t_{cure} (see Table 7). The applied torque shall not exceed the values T_{max} given in Table 1.

POLYFIXER 500 - Pure Epoxy

Electric resistance and thermal conductivity acc. to DIN EN ISO/IEC 1705

Parameter	Test method	Value
Electric resistance	IEC 93 ¹⁾	1.2 · 10 ¹² Ωm
Thermal conductivity	modified transient plane source method ²⁾	0.48 W/m K

Notes:

1) measurement parameters:

Mean thickness of the specimen	0.9 mm
Ambient conditions	23 °C/ 58% r.H.
Applied voltage	100 V
Duration of test	1 min
Electrode geometry	disc electrode w/ guard ring, effective area: 24 cm ²
Contacting electrode	conducting silver paint

2) Thermal conductivity was determined by the modified transient plane source technique using the Thermal conductivity analyser TCI (C-Therm).

measurement parameters:

Ambient conditions	21-23 °C
Test method / calibration	Polymers
Contact agent	water

POLYFIXER 500 - Pure Epoxy

Notes

PAGE 2 :

Typical characteristic and design resistance performance with 5.8 grade studding and associated installation data

All data is based on correct installation - see instructions

No influence of edge and spacing

Minimum base material thickness $h_{ef} + 30\text{mm} > 100\text{mm}$ for M8 to M12 and for M16 to M30 $h_{ef} + 2d$

h_{ef} range minimum or $4d$ whichever is greatest to $20d$

Concrete strength C20/25 - f_c cube = 25N/mm^2 (25MPa)

5.8 grade stud

Temperature range i maximum long term / short term temperature +24/40°C

PAGE 3 - 5 :

Design Resistance with various stud strengths, material and rebar.

Note 1 for stainless steel tensile strength is 500N/mm^2 (500MPa)

Note 2 for stainless steel tensile strength is 700N/mm^2 (500MPa)

Data shown below the minimum embedment depth is for reference only. Please refer to manufacturer for advice.

PAGE 6 and 9 :

Characteristic and Design Load resistances based on characteristic bond strengths for $h_{ef} 4d$ (minimum embedment) to $20d$

All data is based on correct installation - see instructions

No influence of edge and spacing

Minimum base material thickness $h_{ef} + 30\text{mm} > 100\text{mm}$ for M8 to M12 and for M16 to M30 $h_{ef} + 2d$

h_{ef} range minimum or $4d$ whichever is greatest to $20d$

Concrete strength C20/25 - f_c cube = 25N/mm^2 (25MPa)

Temperature range i maximum long term / short term temperature +24/40°C

PAGE 7 & 10 :

Bond Strength Factors

Select concrete strength and environmental condition and apply to bond strength table on page 4

PAGE 11 :

Material Properties for grades of other threaded rod and rebar

All grades shown for information

M30 studding is 8.8 grade instead of 5.8 grade

M30 for A4-70 tensile strength of 500N/mm^2 , (500MPa) instead of 700N/mm^2 (700MPa)

Safety Factors

For 8.8 grade stud - Tension 1.5 Shear 1.25 / For 10.9 grade stud - Tension 1.4 Shear 1.5

For A4-70 and A4-80 Tension 1.87 Shear 1.56 / For rebar - Tension 1.4 Shear 1.5

Partial Safety Factors Pages 2,3,4,5,6,7,8,9,10:

1.8 for 8mm-16mm rebar and studs

2.1 for 16mm and above rebar and studs